

ATTENTION: THIS ROUGHNESS TESTER IS NOT SUITABLE FOR ROUGH TURNING, MILLING AND PLANING WORKPIECES

ROUGHNESS TESTER (BASIC TYPE) CODE ISR-C003



VIDEO

fixture for small shafts (optional)



application



calibration block (included)

- Unit: μm , μin
- Automatic power off

SPECIFICATION

| Parameters | | Ra, Rz, Rq, Rt |
|-------------------|---------------------|---|
| Range | | Ra, Rq: 0.05~15 μm Rz, Rt: 0.1~50 μm |
| Accuracy | | $\pm 10\%$ |
| Resolution (Ra) | | 0.01 μm |
| Probe | type | piezoelectric |
| | stylus radius/angle | 10 μm /90° |
| | stylus material | diamond |
| Measuring force | | 5mN |
| Measuring unit | | μm / μin |
| Cut off | | 0.25/0.8/2.5mm |
| Evaluation length | | 1.25mm for cut off 0.25mm 4mm for cut off 0.8mm 5mm for cut off 2.5mm |
| Moving speed | | 0.75mm/s |
| Power | | built-in rechargeable battery |
| Dimension (L×W×H) | | 106×70×24mm |
| Weight | | 200g |

STANDARD DELIVERY

| | |
|-------------------|------|
| Main unit | 1 pc |
| Calibration block | 1 pc |
| AC/DC adapter | 1 pc |

15

SURFACE ROUGHNESS SPECIMEN SET CODE ISR-CS130-W

INSIZE PLUS
MADE IN EUROPE



- For checking, identifying and specifying the roughness by symbol
- Rust-proof, made of pure Nickel

| Machining method | Roughness (Ra) | Roughness (Rz) | Quantity |
|--------------------|---|--------------------------------------|----------|
| Flat lapping | 0.05, 0.1, 0.2 μm | 0.55, 1, 1.6 μm | 3 pcs |
| | 2, 4, 8 μin | | |
| Reaming | 0.4, 0.8, 1.6 μm | 3, 6, 10 μm | 3 pcs |
| | 16, 32, 63 μin | | |
| Plain grinding | 0.05, 0.1, 0.2, 0.4, 0.8, 1.6 μm | 0.55, 1, 1.6, 3, 6, 10 μm | 6 pcs |
| | 2, 4, 8, 16, 32, 63 μin | | |
| Horizontal milling | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5 μm | 2.5, 4, 8, 16, 32, 50 μm | 6 pcs |
| | 16, 32, 63, 125, 250, 500 μin | | |
| Vertical milling | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5 μm | 2.5, 4, 8, 16, 32, 50 μm | 6 pcs |
| | 16, 32, 63, 125, 250, 500 μin | | |
| Turning | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5 μm | 2.5, 4, 8, 16, 32, 50 μm | 6 pcs |
| | 16, 32, 63, 125, 250, 500 μin | | |

SURFACE ROUGHNESS SPECIMENS

INSIZE PLUS
MADE IN EUROPE



- For checking, identifying and specifying the roughness by symbol
- Rust-proof, made of pure Nickel

ISR-CS315

| Code | Machining method | Roughness (Ra) | Roughness (Rz) | Quantity |
|-----------|--------------------------|---|---|----------|
| ISR-CS315 | surface grinding | 0.025, 0.05, 0.1, 0.2, 0.4, 0.8, 1.6, 3.2µm | 0.29, 0.55, 0.91, 1.74, 2.6, 4.65, 7.87, 15.6µm | 8 pcs |
| ISR-CS316 | cylindrical grinding | 0.025, 0.05, 0.1, 0.2, 0.4, 0.8, 1.6, 3.2µm | 0.3, 0.53, 0.88, 1.56, 2.64, 4.4, 7.71, 15.3µm | 8 pcs |
| ISR-CS317 | flat lapping | 0.025, 0.05, 0.1, 0.2µm | 0.4, 0.6, 0.74, 1.26µm | 4 pcs |
| | parallel | 0.025, 0.05, 0.1, 0.2µm | 0.34, 0.56, 1.12, 1.5µm | 4 pcs |
| ISR-CS318 | cylindrical lapping | 0.025, 0.05, 0.1, 0.2µm | 0.46, 0.54, 0.63, 1.23µm | 4 pcs |
| | superfinishing | 0.025, 0.05, 0.1, 0.2µm | 0.36, 0.7, 1, 1.4µm | 4 pcs |
| ISR-CS319 | face turning | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50µm | 1.92, 3.2, 6.15, 12.5, 23.7, 48.7, 102, 185µm | 8 pcs |
| ISR-CS320 | cylindrical turning | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50µm | 1.7, 3.2, 6.1, 12.2, 23.7, 47.5, 95, 190µm | 8 pcs |
| ISR-CS321 | end milling | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50µm | 1.92, 3.82, 6.45, 12.2, 25.2, 49.8, 92.6, 191µm | 8 pcs |
| ISR-CS322 | reaming | 0.4, 0.8, 1.6, 3.2µm | 1.7, 3.2, 6.4, 12.8µm | 4 pcs |
| | drilling | 1.6, 3.2, 6.3, 12.5µm | 7.5, 15.5, 31, 60µm | 4 pcs |
| ISR-CS323 | horizontal milling | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50µm | 1.8, 3.68, 6.63, 12.8, 25.6, 53, 97.5, 197µm | 8 pcs |
| ISR-CS325 | shaping (planing) | 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50, 100µm | 3.84, 6.7, 12.2, 25.2, 48.7, 99.9, 190, 361µm | 8 pcs |
| ISR-CS326 | finishing (belt sanding) | 0.1, 0.2, 0.4, 0.8, 1.6, 3.2µm | 0.9, 1.55, 3.37, 7.42, 18.5, 31µm | 6 pcs |
| ISR-CS328 | vertical grinding | 0.2, 0.4, 0.8, 1.6, 3.2, 6.3µm | 1.1, 3.5, 6.15, 8.78, 22.19, 40.8µm | 6 pcs |
| ISR-CS329 | grit blasting | 3.2, 10.5, 18, 25µm | 19.2, 63, 108, 150µm | 4 pcs |
| | shot blasting | 3.2, 8, 13, 18µm | 19.2, 48, 78, 108µm | 4 pcs |
| ISR-CS331 | spark erosion (EDM) | 0.4, 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50µm | 2.5, 4.5, 7.2, 14.2, 24.7, 51.2, 105, 196µm | 8 pcs |
| ISR-CS333 | hand filing | 0.4, 0.8, 1.6, 3.2, 6.3µm | 3, 5.6, 12.4, 22.5, 61µm | 5 pcs |
| ISR-CS334 | castings | 0.8, 1.6, 3.2, 6.3, 12.5, 25, 50µm | 3.2, 8, 16, 32, 56, 112, 225µm | 7 pcs |
| ISR-CS335 | honing | 0.05, 0.1, 0.2, 0.4, 0.8, 1.6µm | 0.31, 0.56, 1, 2, 4.2, 9µm | 6 pcs |
| ISR-CS336 | polishing | 0.0125, 0.025, 0.05, 0.1, 0.2µm | 0.29, 0.35, 0.67, 0.72, 1.52µm | 5 pcs |

SHOT AND GRIT BLASTING SURFACE ROUGHNESS SPECIMENS

INSIZE PLUS
MADE IN EUROPE



- To check the roughness of steel surfaces which have been blast cleaned before painting
- Meets ISO 8503/1
- Rust-proof, made of pure Nickel
- Each piece contains 4 parts

ISR-CS017


| Code | Machining method | Roughness (Ra) | Roughness (Rz) |
|-----------|------------------|---------------------|----------------------|
| ISR-CS017 | shot blasting | 3.2, 8, 13, 18µm | 19.2, 48, 78, 108µm |
| ISR-CS018 | grit blasting | 3.2, 10.5, 18, 25µm | 19.2, 63, 108, 150µm |

MEASURING ACCURACY OF ROUGHNESS TESTERS CAN BE IMPROVED,
IF THE CALIBRATION IS MADE ON A REFERENCE SPECIMEN WITH THE
ROUGHNESS VALUE CLOSE TO THE WORKPIECE TO BE MEASURED

SURFACE ROUGHNESS REFERENCE SPECIMENS

INSIZE PLUS
MADE IN EUROPE

- To calibrate roughness testers
- Meets ISO 5436-1: 2000
- Rust proof, made of pure Nickel

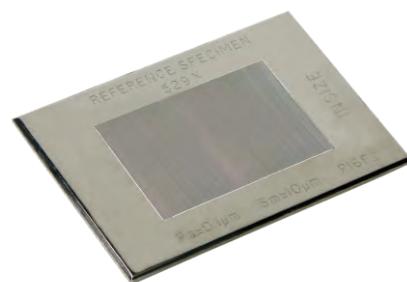

ISR-RS529X

| Code | Roughness (Ra) |
|------------|----------------|
| ISR-RS525X | 6.25μm* |
| ISR-RS526X | 3.15μm* |
| ISR-RS527X | 3.0μm * |
| ISR-RS528X | 0.5μm * |
| ISR-RS529X | 0.1μm * |
| ISR-RS530X | 1.0μm * |
| ISR-RS531X | 0.3μm * |

*The actual value may be slightly different

MEASURING ACCURACY OF ROUGHNESS TESTERS CAN BE IMPROVED,
IF THE CALIBRATION IS MADE ON A REFERENCE SPECIMEN WITH THE
ROUGHNESS VALUE CLOSE TO THE WORKPIECE TO BE MEASURED

SURFACE ROUGHNESS REFERENCE SPECIMENS

- To calibrate roughness testers
- Made of glass



ISR-LS603

| Code | Roughness (Ra) |
|-----------|----------------|
| ISR-LS601 | 0.1μm* |
| ISR-LS602 | 0.2μm* |
| ISR-LS603 | 0.4μm* |
| ISR-LS604 | 0.8μm* |
| ISR-LS605 | 1.6μm* |
| ISR-LS606 | 3.2μm* |
| ISR-LS607 | 6.4μm* |

*The actual value may be slightly different